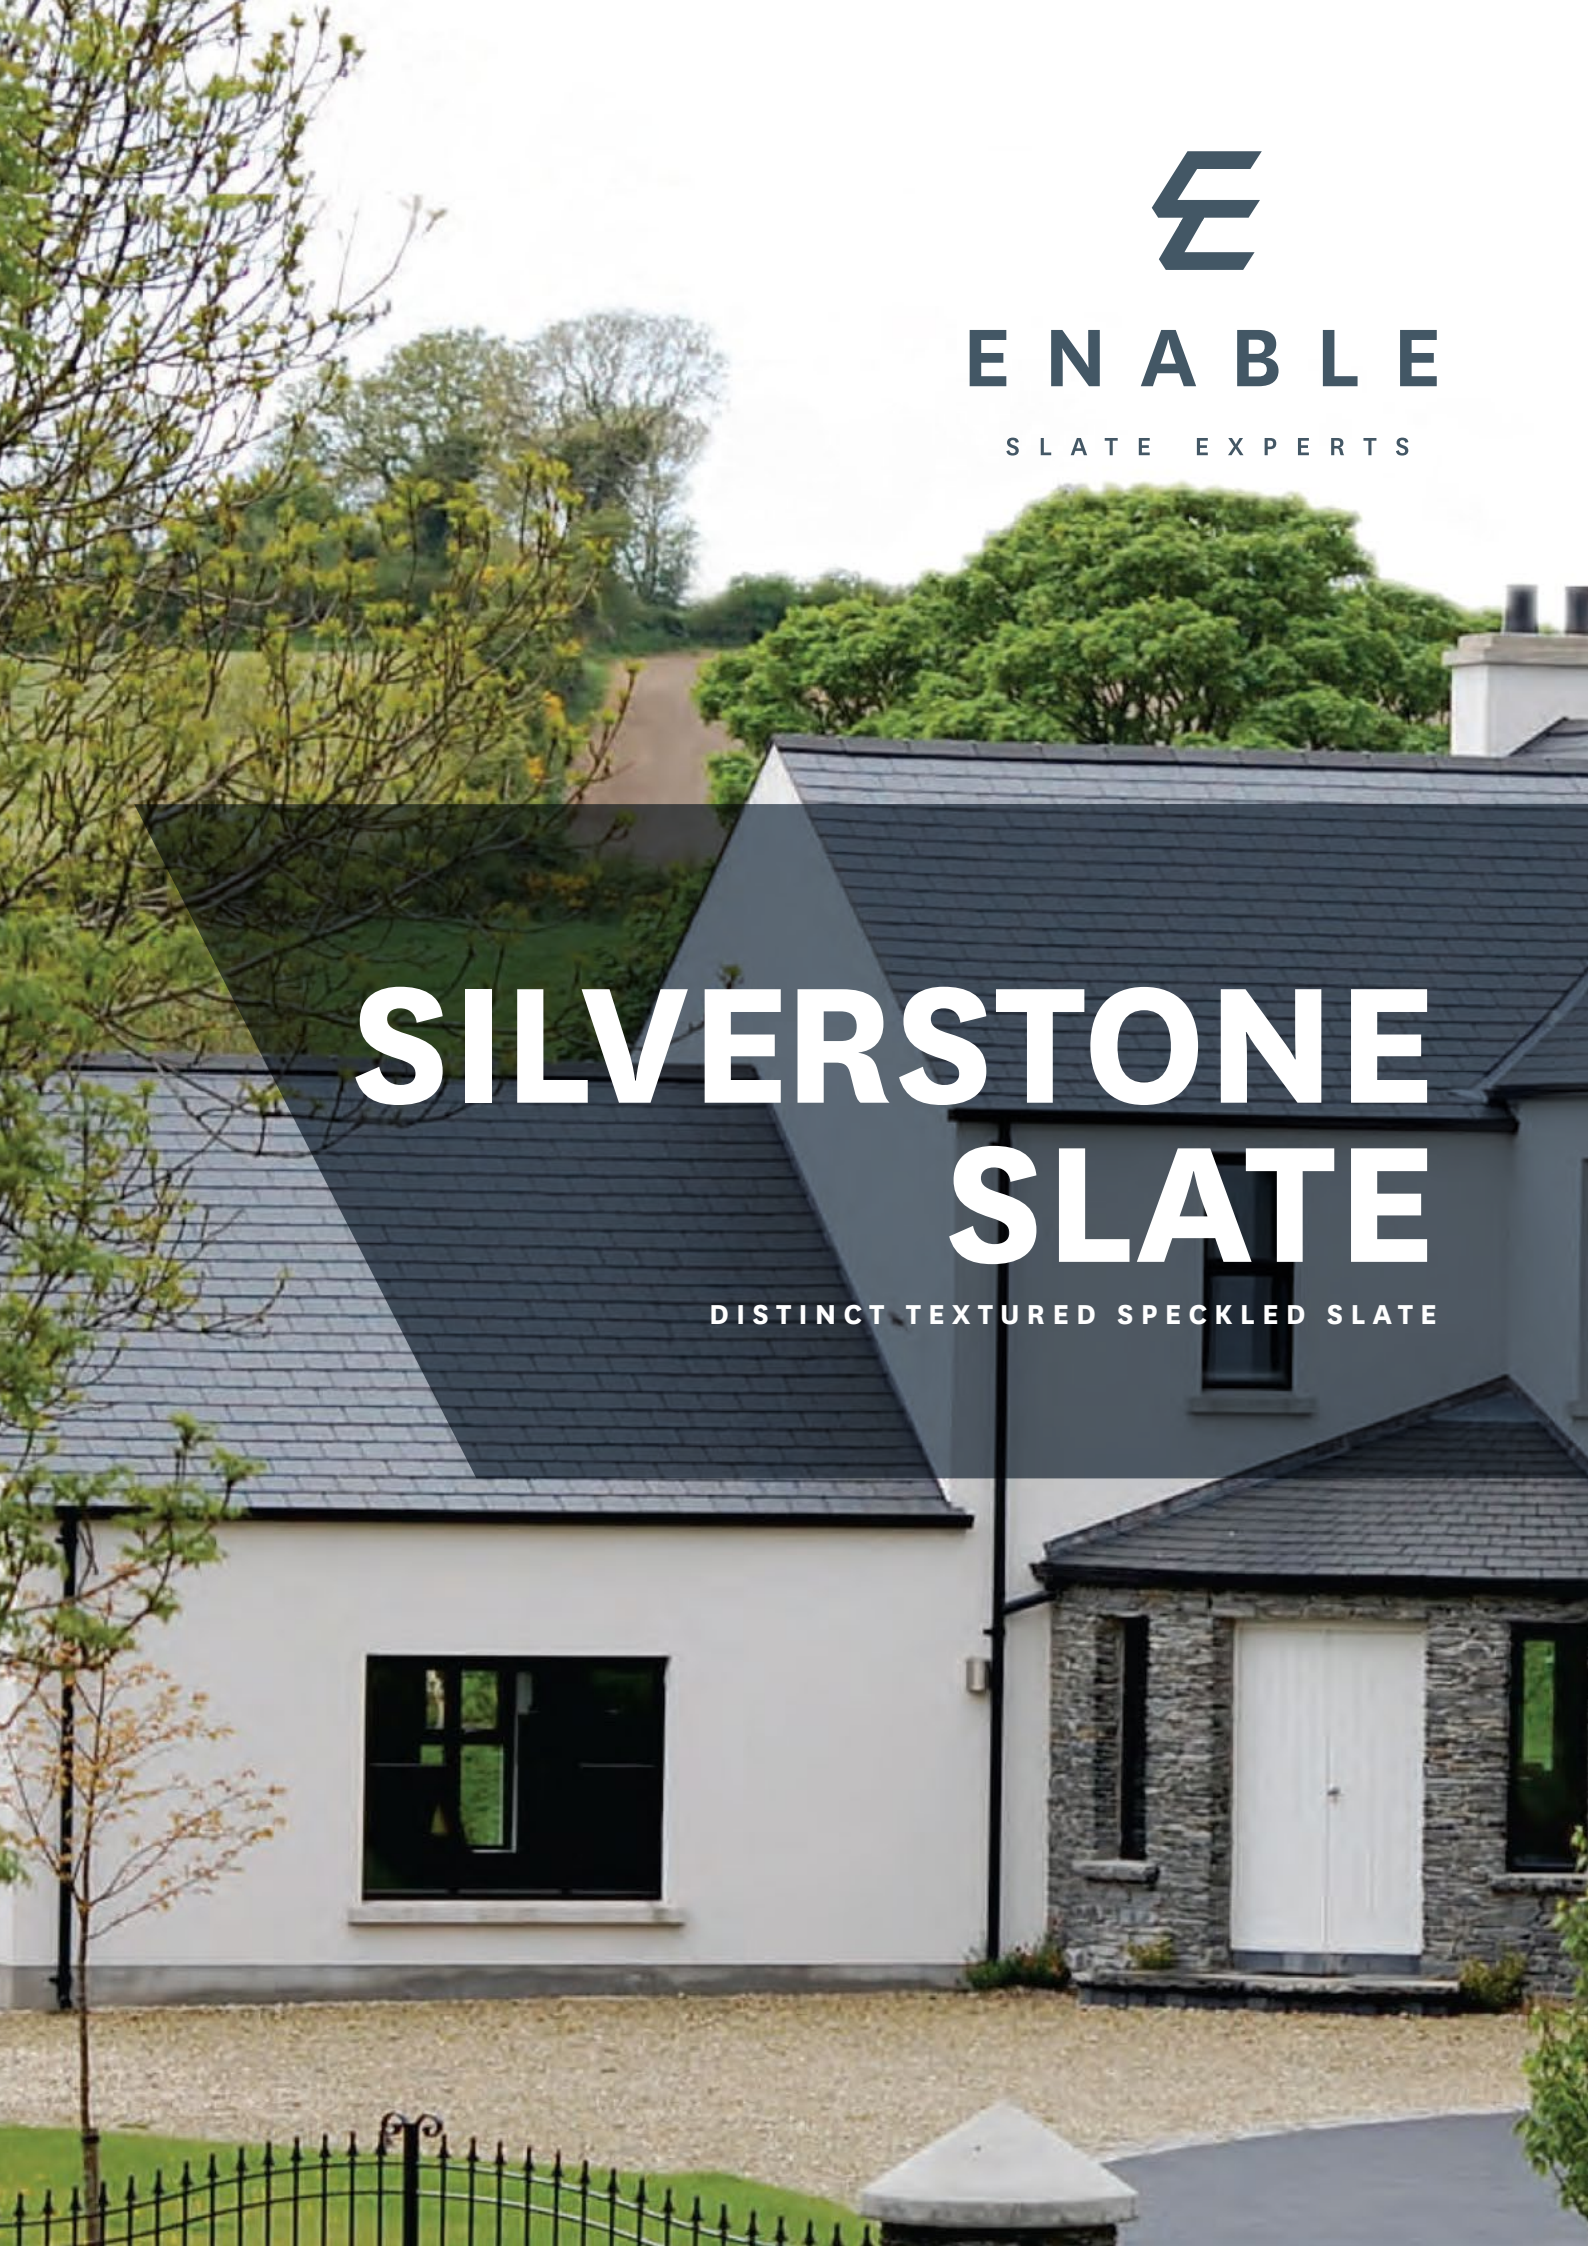

ENABLE

SLATE EXPERTS

SILVERSTONE SLATE

DISTINCT TEXTURED SPECKLED SLATE

TECHNICAL DATA

Size (overall)	500 x 250 mm 400 x 250 mm
Minimum Pitch	22.5°
Maximum Pitch	90°
Minimum Gauge	150 mm
Minimum Gauge	190 mm
Covering Capacity (net) **500 x 250 mm**	
At Max Gauge	20 slates/m²
Weight	
Per 1000 slates	1.235 tonnes
At max gauge	36.5 kg/m²
Battens Required	
At max gauge	5.0 m/m²
Minimum Batten Sizes	
Rafter centres up to 600 mm	50 x 25 mm
Nail Size	38 x 3.15 mm
Number of Slates per Pallet	Approx 700



This is a guide and covers the majority of the conditions in New Zealand. For a full range of technical data specific to your location and project please contact Enable Slate Experts.

A popular product amongst roofing contractors, Silverstone has a very distinct appearance due to its grain. It is speckled with inert mineral inclusions and its colour will not fade, even in the strongest sunlight.

PROVEN

In addition to passing our own rigorous quality-control tests, Silverstone has been tested in accordance with BS EN 12326. It carries the CE marking and is classified as 'A1, T1, S1 '. It has also tested to the rigorous Norm Francais (NF 228).

APPEARANCE

Silverstone is grey in colour and is a smooth textured slate approximately 4-5mm thick with sawn dressed edges. It is sourced from North-West Spain in the heart of the quarrying region of Orense.

GUARANTEED

Silverstone" First, blue-black roofing slate is covered by a 75 year guarantee.

ENABLE

SLATE EXPERTS

P 0800 100 172
E hello@enableslate.co.nz

251 Styx Mill Road
Casebrook
Christchurch 8051

www.enableslate.co.nz