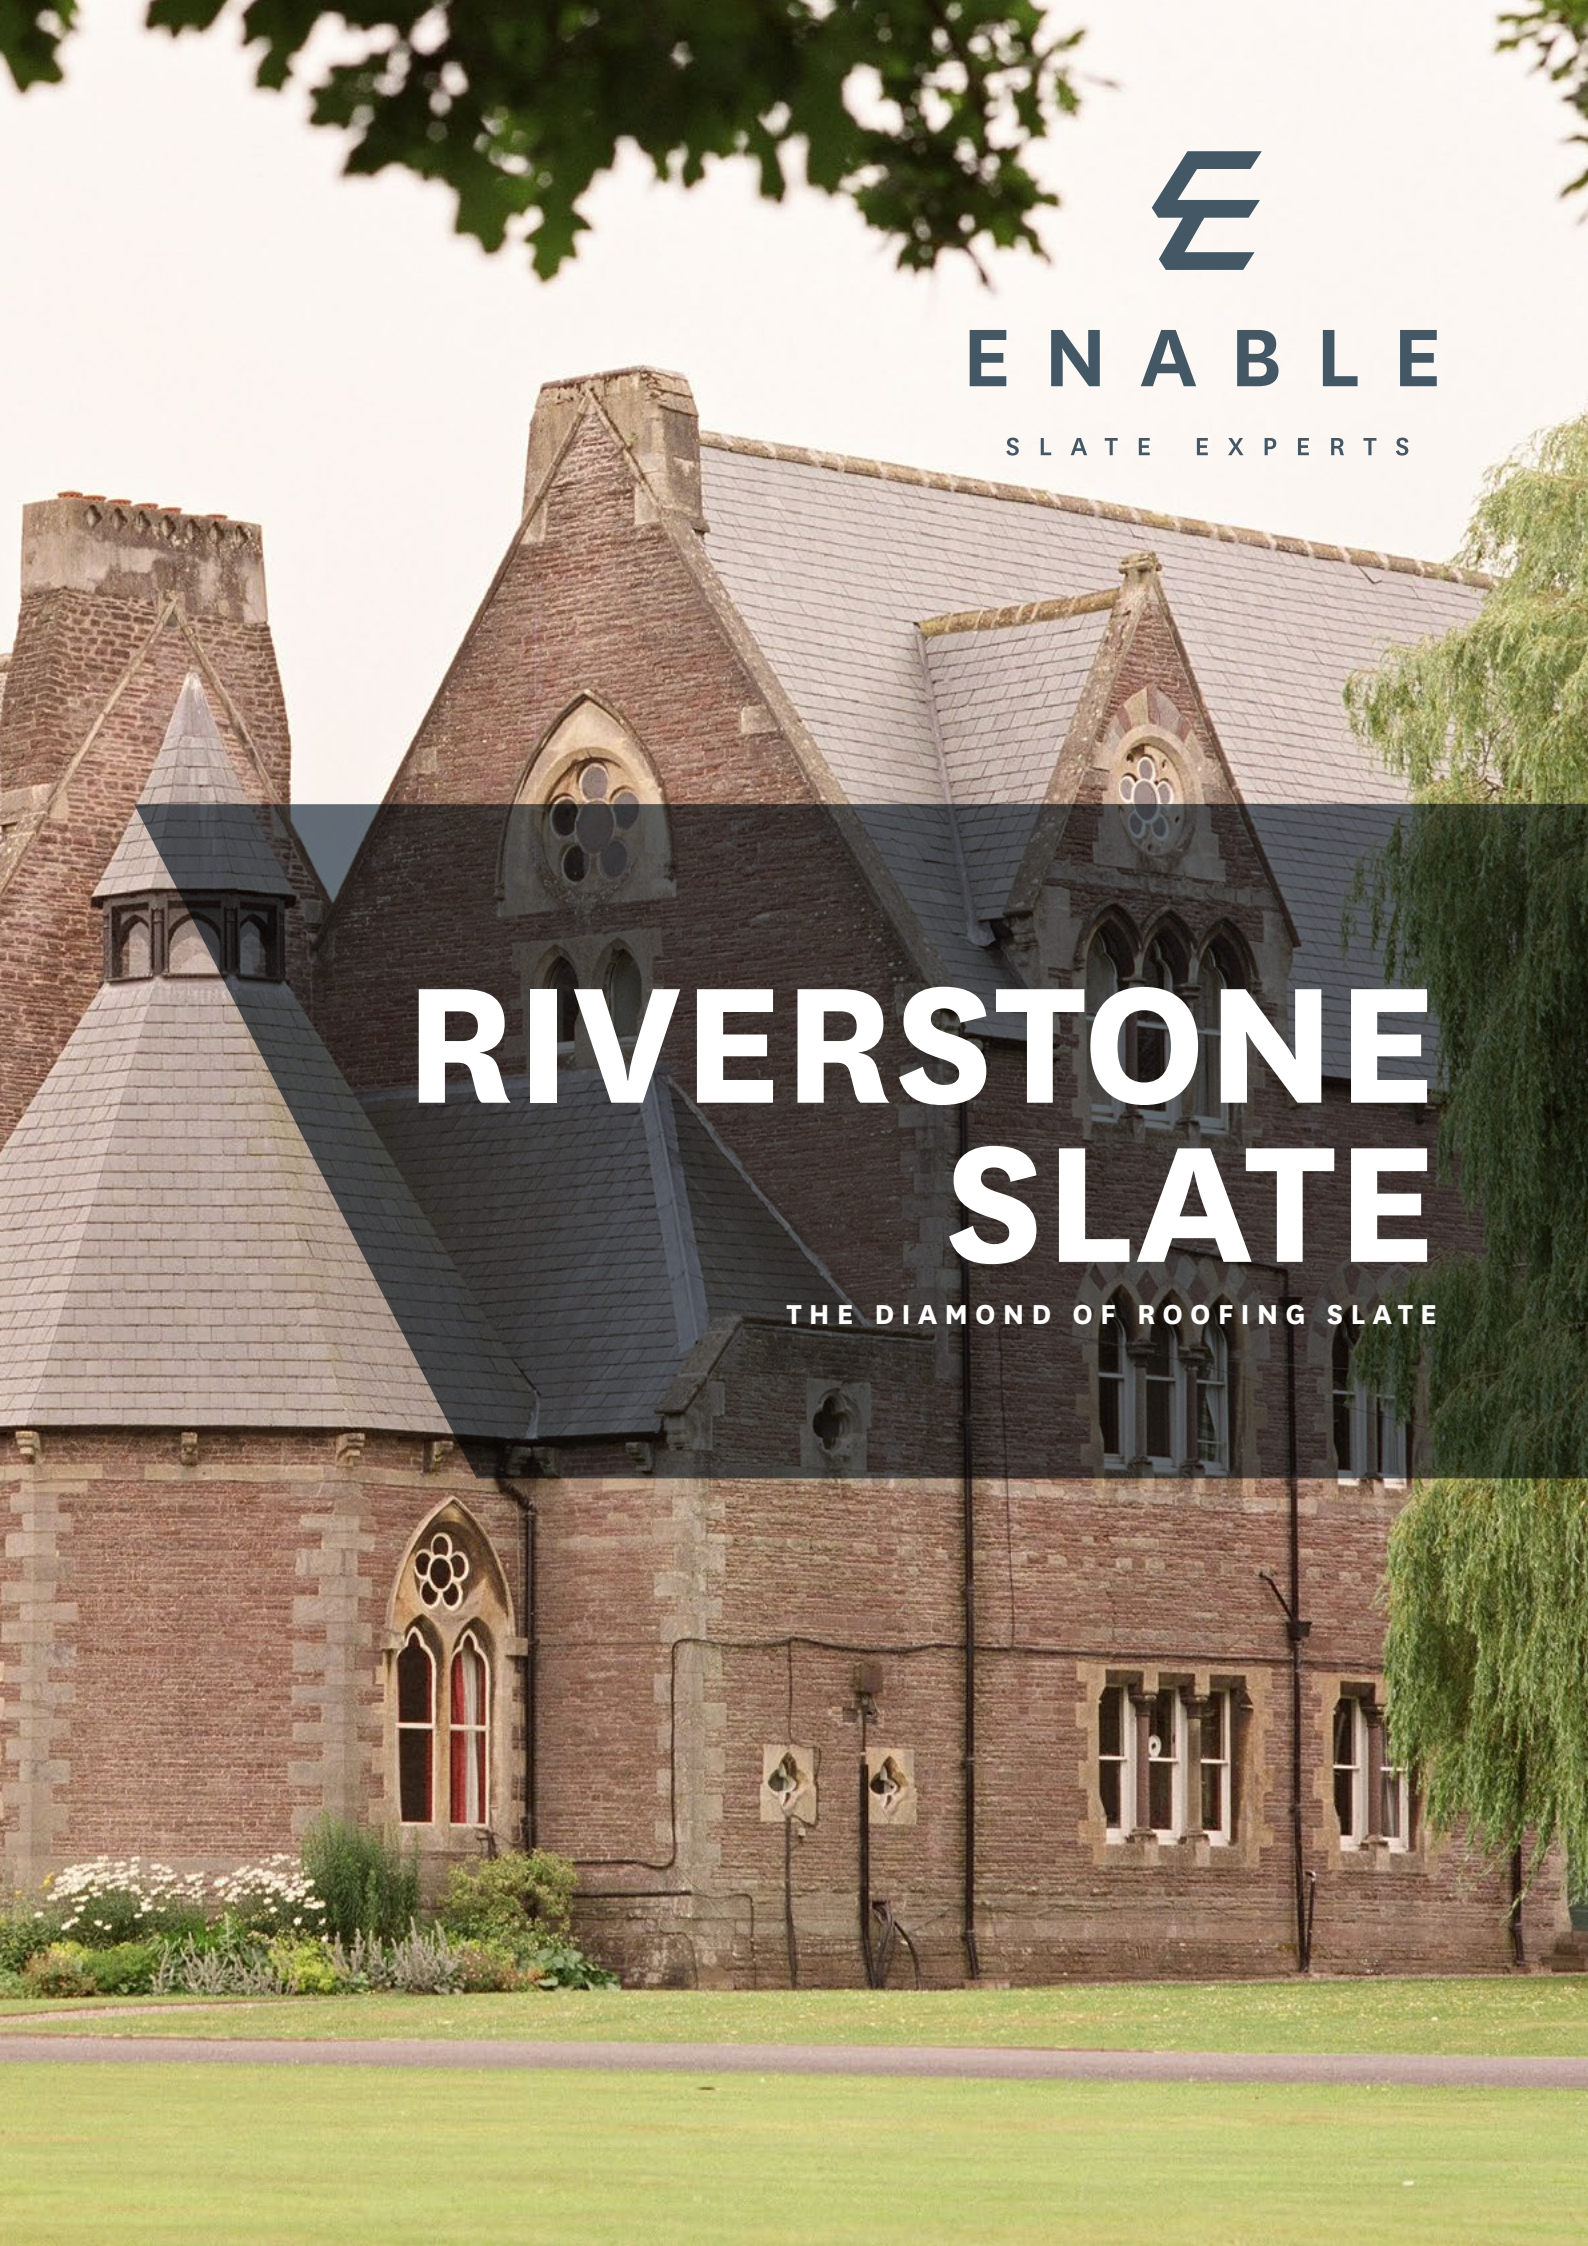

ENABLE

SLATE EXPERTS

RIVERSTONE SLATE

THE DIAMOND OF ROOFING SLATE



Riverstone is a phyllite, the diamond of roofing slate – a rock similar to slate, sharing its essential characteristics but surpassing its qualities – taken from the La Florida Quarry in the San Luis region of Central Argentina.

APPEARANCE

Riverstone roofing slate is a medium-grey colour with a slightly coarser grain than other slate and a unique satin-like luster. The colour is totally natural and will not fade, even in the strongest sunlight or harshest environments.

TRUSTED

Riverstone is one of the few slates certified for use by English Heritage and Historic Scotland, the leading authorities charged with preserving Britain's landmark structures.

GUARANTEED

SSQ, our supplier, stands behind their slates, guaranteeing the Ultra range for 100 years, and the other Riverstone ranges for 75 years.

TESTED

Riverstone has surpassed the strictest testing requirements and has achieved the highest classifications in the US, UK and France.

In addition to passing SSQ's own rigorous quality-control tests, Riverstone has been tested in accordance with EN12326 and carries the CE marking. It is ideal, with suitable fixing and detailing, for pitches as low as 17.5°.









TECHNICAL DATA

Size (overall)	250 x 500 mm
Minimum Pitch	22.5°
Maximum Pitch	90°
Minimum Gauge	150 mm
Minimum Gauge	190 mm
Covering Capacity (net) **500 x 250 mm**	
At Max Gauge	20 slates/m²
Weight	
Per 1000 slates	1.235 tonnes
At max gauge	36.5 kg/m²
Battens Required	
At max gauge	5.0 m/m²
Minimum Batten Sizes	
Rafter centres up to 600 mm	50 x 25 mm
Nail Size	38 x 3.15 mm
Number of Slates per Pallet	Approx 700

This is a guide and covers the majority of the conditions in New Zealand. For a full range of technical data specific to your location and project please contact Enable Slate Experts.



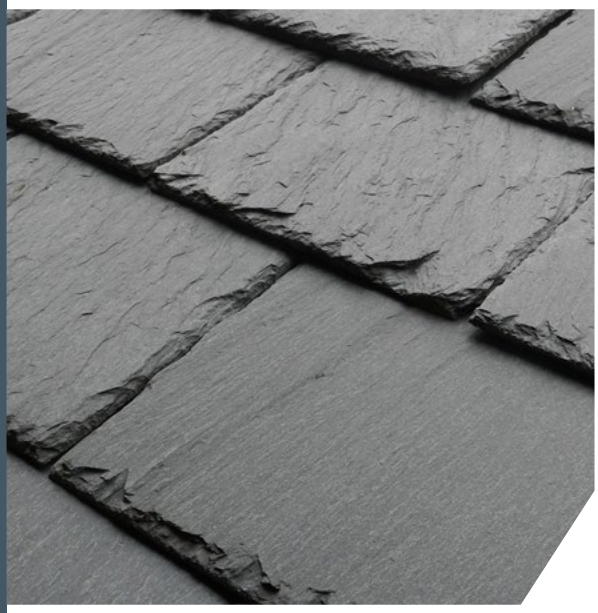

ENABLE

SLATE EXPERTS

P 0800 100 172

E hello@enableslate.co.nz

251 Styx Mill Road
Casebrook
Christchurch 8051

www.enableslate.co.nz